

90101136 VIGOROUS 10

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 14°



Anti - trendelenburg position : 0 - 14°



Mattress platform minimum height : 43 cm (150 mm with castor)




Mattress platform maximum height : 80 cm (150 mm with castor)


HOSPITAL BED 4 MOTORS WITH COLUMNS (FH)

OPTIONS

GROUP 1 / CASTOR OPTIONS




GROUP 2 / SIDE RAIL OPTIONS




GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 4 / BACKREST MOTOR OPTIONS



GROUP 5 / LEGREST MOTOR OPTIONS




GROUP 6 / CONTROL PANEL OPTIONS



GROUP 7 / MATTRESS PLATFORM OPTIONS



GROUP 8 / OTHER ACCESSORY OPTIONS

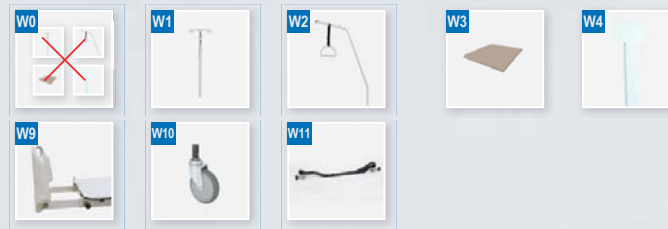

DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)	C1 HAND REMOTE CONTROL PROTECTION CATEGORY : IP 66
T14 CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)	C2 SIDE RAIL CONTROL PANEL RIGHT
T17 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)	C3 SIDE RAIL CONTROL PANEL LEFT
K0 WITHOUT SIDE RAIL	Y1 REMOVABLE 4 PARTED MESH PLATFORM.
K5 WITH PE SIDE RAIL	Y3 REMOVABLE DOUBLE WALLED PE BED PLATFORM
E0 WITHOUT ELECTRICAL ACCESSORIES	W0 WITHOUT OTHER ACCESSORIES
E1 BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.	W1 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
E2 NURSE CONTROL PANEL. PROTECTION CATEGORY : IP 66. 15 FUNCTION KEY. UNDER BED LIGHTING SYSTEM	W2 LIFTING POLE : BEARING CAPACITY 75 Kg
E3 FOOT CONTROL PEDAL. ONE PEDAL CPR. ONE PEDAL EXAMINATION POSITION FROM EACH SIDE. SENSITIVE INTEGRATED SCALE SYSTEM	W3 X-RAY AVAILABLE FOR BACK SIDE
E4 FOOT CONTROL PEDAL. ONE PEDAL CPR. ONE PEDAL EXAMINATION POSITION FROM EACH SIDE. SENSITIVE INTEGRATED SCALE SYSTEM	W4 TELEVISION STAND FOR 17" LCD TV
E5 SENSITIVE INTEGRATED SCALE SYSTEM	W9 BED EXTENSION : 20 cm.
M1 BACKREST MOTOR (4000 N)	W10 5 TH CASTOR
M2 BACKREST CPR MANUAL CONTROL MOTOR (2000 N)	W11 RESTRAINT STRAP
M3 LEGREST MOTOR (4000 N)	
M4 LEGREST CPR MANUAL CONTROL MOTOR (2000 N)	

Red box: Must select only one of them.

Green box: Must select minimum one. Can select 1-2-3 ... both.

Blue box: Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverse trendelenburg, head and foot movements with the help of an electrical motor.
- Head and foot platforms with automatic sliding system.
- Back angle indication assembled on head rail.
- Angle indication assembled on foot rail showing trendelenburg and reverse trendelenburg.
- The easily mountable and demountable cap system designed of hygienic PE plastic is fixed to the lower case from the head side; thus possible damage to the frame is avoided when the bed is converted to trendelenburg position.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Upper and lower points of lower case regions of the column motor connection regions are covered with PE plastic material in terms of hygiene and ease of cleaning.
- Optional laminate color choice.^(RELX)


TECHNICAL SPECIFICATIONS

■ External dimension	: 102 x 218 cm
■ Width outside side rails	: 99 cm
■ Mattress platform	: 89 x 195 cm
■ Bed extension	: +20 cm
■ Recommended mattress dimension	: 86 x 193 x 12 cm
■ Autoregression (Backrest and Legrest)	: 12 cm
■ Safe Operating Load (Inc. Mattress and Accessories)	: 230 kg
■ Weight	: ~ 124 kg
■ Volume	: 1,05 m ³

ELECTRICAL SPECIFICATIONS

■ Power Input	: 230 V AC 50 Hz Max 1 A
■ Power Output	: 24 V DC
■ Electrical Current Protection	: Class 1, Type B
■ Liquid and Dust Protection	: IP54 – IP66

SIDE RAIL SYSTEM

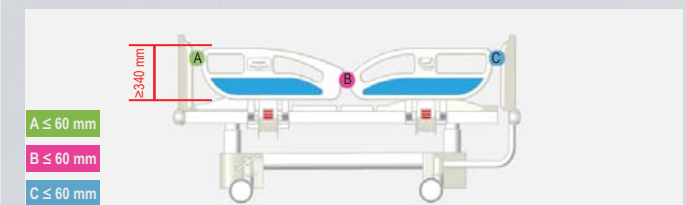

Full side guardrail system with two pieces that is designed in compliance with the EN 60601-2-52 standard, which was started to be applied in Europe and will be applicable in Turkey in following years; provides maximum safety for the in-patient and completely extinguishes the falling risk for the patient. The empty spaces on the guardrail do not prevent monitoring the patient in any of the positions.

It is designed conveniently to support the patient while getting off the bed. By the courtesy of the aluminum coupling pieces as used on the guardrail, the guardrail is saved from deformation when the patient gives load on the guardrail.

When the guardrail system is brought to the lowest level it is hidden under the platform of the bed and it does not establish an obstacle while transferring the patient.

In standard guardrail systems bacteria grow on the region of the guardrail mounting coupling screws making the hygiene more difficult. In Vigorous seat system, the coupling screws are hidden with laminate in order to minimize the surfaces where bacteria may grow and thus smooth surfaces are achieved. Guardrails are in concert with the bed head system by the courtesy of the laminate colors on the guardrails.



* RL : Laminate color options page 80.

90101137 VIGOROUS 11

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 16°



Anti - trendelenburg position : 0 - 16°



Mattress platform minimum height : 48 cm (125 mm with castor)



Mattress platform maximum height : 78 cm (125 mm with castor)

HOSPITAL BED 4 MOTORS WITH SCISSOR

OPTIONS

GROUP 1 / CASTOR OPTIONS




GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 6 / CONTROL PANEL OPTIONS




GROUP 8 / OTHER ACCESSORY OPTIONS

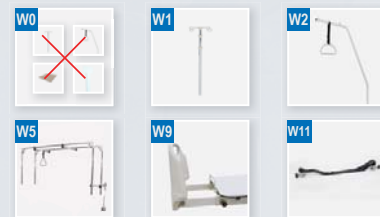


GROUP 2 / SIDE RAIL OPTIONS



GROUP 4 / BACKREST MOTOR OPTIONS



GROUP 5 / LEGREST MOTOR OPTIONS



GROUP 7 / MATTRESS PLATFORM OPTIONS



DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)	C1 HAND REMOTE CONTROL PROTECTION CATEGORY : IP 66
T14 CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)	C2 SIDE RAIL CONTROL PANEL RIGHT
T17 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)	C3 SIDE RAIL CONTROL PANEL LEFT
K0 WITHOUT SIDE RAIL	Y1 REMOVABLE 4 PARTED MESH PLATFORM.
K5 WITH PE SIDE RAIL	Y3 REMOVABLE DOUBLE WALLED PE BED PLATFORM
E0 WITHOUT ELECTRICAL ACCESSORIES	W0 WITHOUT OTHER ACCESSORIES
E1 BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.	W1 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
E2 NURSE CONTROL PANEL. PROTECTION CATEGORY : IP 66. 15 FUNCTION KEY. UNDER BED LIGHTING SYSTEM	W2 LIFTING POLE : BEARING CAPACITY 75 Kg
E3 FOOT CONTROL PEDAL. ONE PEDAL CPR. ONE PEDAL EXAMINATION POSITION FROM EACH SIDE.	W3 X-RAY AVAILABLE FOR BACK SIDE
E4 FOOT CONTROL PEDAL. ONE PEDAL CPR. ONE PEDAL EXAMINATION POSITION FROM EACH SIDE. BACKREST MOTOR (4000 N)	W4 TELEVISION STAND FOR 17" LCD TV
M1 BACKREST MOTOR (4000 N)	W5 TRACTION APPARATUS
M2 BACKREST CPR MANUAL CONTROL MOTOR (2000 N)	W9 BED EXTENSION : 20 cm.
M3 LEGREST MOTOR (4000 N)	W11 RESTRAINT STRAP
M4 LEGREST CPR MANUAL CONTROL MOTOR (2000 N)	

Must select only one of them.

Must select minimum one. Can select 1-2-3 ... both.

Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverse trendelenburg, head and foot movements with the help of an electrical motor.
- Head and foot platforms with automatic sliding system.
- Back angle indication assembled on head rail.
- Angle indication assembled on foot rail showing trendelenburg and reverse trendelenburg.
- Easily removable and installable head board system designed of hygienic PE plastic.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Profile frame with easy removable PE plastic covers.
- Optional laminate color choice.^(RLX)


TECHNICAL SPECIFICATIONS

External dimension	: 102 x 217,5 cm
Width outside side rails	: 99 cm
Mattress platform	: 89 x 195 cm
Bed extension	: +20 cm
Recommended mattress dimension	: 86 x 193 x 12 cm
Autoregression (Backrest and Legrest)	: 12 cm
Safe Operating Load (Inc. Mattress and Accessories)	: 230 kg
Weight	: ~ 114 kg
Volume	: 1,15 m ³

ELECTRICAL SPECIFICATIONS

Power Input	: 230 V AC 50 Hz Max 1 A
Power Output	: 24 V DC
Electrical Current Protection	: Class 1, Type B
Liquid and Dust Protection	: IP54 – IP66

SIDE RAIL SYSTEM

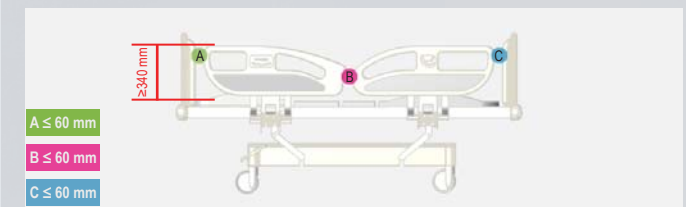

Full side guardrail system with two pieces that is designed in compliance with the EN 60601-2-52 standard, which was started to be applied in Europe and will be applicable in Turkey in following years; provides maximum safety for the in-patient and completely extinguishes the falling risk for the patient. The empty spaces on the guardrail do not prevent monitoring the patient in any of the positions. It is designed conveniently to support the patient while getting off the bed. By the courtesy of the aluminum coupling pieces as used on the guardrail, the guardrail is saved from deformation when the patient gives load on the guardrail. When the guardrail system is brought to the lowest level it is hidden under the platform of the bed and it does not establish an obstacle while transferring the patient. In standard guardrail systems bacteria grow on the region of the guardrail mounting coupling screws making the hygiene more difficult. In Vigorous seat system, the coupling screws are hidden with laminate in order to minimize the surfaces where bacteria may grow and thus smooth surfaces are achieved. Guardrails are in concert with the bed head system by the courtesy of the laminate colors on the guardrails.



* RL : Laminate color options page 80.

90101139 VIGOROUS 13

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Trendelenburg position : 0 - 12°



Mattress platform height : 49 cm


HOSPITAL BED 2 MOTORS

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 4 / CONTROL PANEL OPTIONS



GROUP 5 / MATTRESS PLATFORM OPTIONS



GROUP 6 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)	C1 HAND REMOTE CONTROL. PROTECTION CATEGORY : IP 66
T16 CASTOR TWO WITH BRAKE (125 MM)	C2 SIDE RAIL CONTROL PANEL. RIGHT
T4 METAL CASTOR TWO WITH BRAKE (125 MM)	C3 SIDE RAIL CONTROL PANEL. LEFT
T14 CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)	Y1 REMOVABLE 4 PARTED MESH PLATFORM.
T17 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)	Y3 REMOVABLE DOUBLE WALLED PE BED PLATFORM
K0 WITHOUT SIDE RAIL	W0 WITHOUT OTHER ACCESSORIES
K5 WITH PE SIDE RAIL	W1 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
E0 WITHOUT ELECTRICAL ACCESSORIES	W2 LIFTING POLE : BEARING CAPACITY 75 Kg
E1 BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.	W4 TELEVISION STAND FOR 17" LCD TV
E3 UNDER BED LIGHTING SYSTEM	W5 TRACTION APPARATUS

- Must select only one of them.
- Must select minimum one. Can select 1-2-3 ... both.
- Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Head and foot movements with the help of an electrical motor.
- Trendelenburg movement by the help of shock absorber mechanism at foot side.
- Head and foot platforms with automatic sliding system.
- Ergonomic, durable and easily cleanable rails system with maximum safety designed in accordance with the standards of EN 60601-2-38.
- Back angle indication assembled on head rail.
- Angle indication assembled on foot rail showing trendelenburg and reverse trendelenburg.
- Easily removable and installable head board system designed of hygienic PE plastic.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional laminate color choice.^(RLX)

TECHNICAL SPECIFICATIONS

■ External dimension	:	102 x 217,5 cm
■ Width outside side rails	:	99 cm
■ Mattres platform	:	89 x 195 cm
■ Recommended mattress dimension	:	86 x 193 x 12 cm
■ Autoregression (Backrest and Legrest)	:	12 cm
■ Safe Operating Load (Inc. Mattres and Accessories)	:	230 kg
■ Weight	:	~ 89 kg
■ Volume	:	1,17 m ³

ELECTRICAL SPECIFICATIONS

■ Power Input	:	230 V AC 50 Hz Max 1 A
■ Power Output	:	24 V DC
■ Electrical Current Protection	:	Class 1, Type B
■ Liquid and Dust Protection	:	IP54 – IP66



* RL : Laminate color options page 80.

90101204 VIGOROUS 14

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 12°



Anti - trendelenburg position : 0 - 12°



Mattress platform minimum height : 43 cm



Mattress platform maximum height : 73 cm

HOSPITAL BED WITH 4 CRANKS

OPTIONS

GROUP 1 / CASTOR OPTIONS




GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / MATTRESS PLATFORM OPTIONS



GROUP 4 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)	Y1 REMOVABLE 4 PARTED MESH PLATFORM.
T16 CASTOR TWO WITH BRAKE (125 MM)	Y3 REMOVABLE DOUBLE WALLED PE BED PLATFORM
T4 METAL CASTOR TWO WITH BRAKE (125 MM)	W0 WITHOUT OTHER ACCESSORIES
T14 CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)	W1 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
T17 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)	W2 LIFTING POLE : BEARING CAPACITY 75 Kg
K0 WITHOUT SIDE RAIL	W4 TELEVISION STAND FOR 17" LCD TV
K5 WITH PE SIDE RAIL	W5 TRACTION APPARATUS

Red box: Must select only one of them.

Blue box: Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverses trendelenburg, head and foot movements with rotating levers.
- Ergonomic, durable and easily cleanable rails system with maximum safety.
- Easily removable and installable head board system designed of hygienic PE plastic.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional laminate color choice.^(RLX)

TECHNICAL SPECIFICATIONS

■ External dimension	:	105 x 216 cm
■ Width outside side rails	:	99 cm
■ Mattres platform	:	89 x 195 cm
■ Recommended mattress dimension	:	86 x 193 x 12 cm
■ Safe Operating Load (Inc. Mattres and Accessories)	:	230 kg
■ Weight	:	~ 105 kg
■ Volume	:	1,07 m ³



* RL : Laminate color options page 80.

90101107 REBORN 2

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 16°



Anti - trendelenburg position : 0 - 16°



Mattress platform minimum height : 45 cm



Mattress platform maximum height : 85 cm


HOSPITAL BED 4 MOTORS WITH COLUMNS (RH)

OPTIONS

GROUP 1 / CASTOR OPTIONS





GROUP 2 / SIDE RAIL OPTIONS




GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 4 / BACKREST MOTOR OPTIONS




GROUP 5 / LEGREST MOTOR OPTIONS



GROUP 6 / MATTRESS PLATFORM OPTIONS



GROUP 7 / OTHER ACCESSORY OPTIONS

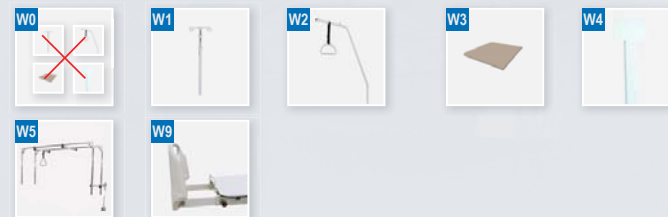

DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)	M3 LEGREST MOTOR (4000 N)
T14 CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)	M4 LEGREST CPR MANUAL CONTROL MOTOR (2000 N)
T17 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)	Y1 REMOVABLE 4 PARTED MESH PLATFORM.
K0 WITHOUT SIDE RAIL	Y3 REMOVABLE DOUBLE WALLED PE BED PLATFORM
K4 WITH ALUMINIUM SIDE RAIL	W0 WITHOUT OTHER ACCESSORIES
E0 WITHOUT ELECTRICAL ACCESSORIES	W1 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
E1 BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.	W2 LIFTING POLE : BEARING CAPACITY 75 Kg
E2 NURSE CONTROL PANEL. PROTECTION CATEGORY : IP 66. 15 FUNCTION KEY.	W3 X-RAY AVAILABLE FOR BACK SIDE
E3 UNDER BED LIGHTING SYSTEM	W4 TELEVISION STAND FOR 17" LCD TV
M1 BACKREST MOTOR (4000 N)	W5 TRACTION APPARATUS
M2 BACKREST CPR MANUAL CONTROL MOTOR (2000 N)	W9 BED EXTENSION : 20 cm.

■ Must select only one of them.

■ Must select minimum one. Can select 1-2-3 ... both.

■ Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverse trendelenburg, head and foot movements with the help of an electrical motor.
- Ergonomic, durable and easily cleanable aluminum rails system with maximum safety designed in accordance with the standards of EN 60601-2-38.
- Head and foot platforms with automatic sliding system.
- Easily removable and installable, hygienic, high resistant head board system designed of compact laminate and aluminum.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Upper and lower points of lower case regions of the column motor connection regions are covered with PE plastic material in terms of hygiene and ease of cleaning.
- Optional laminate color choice.^(R,L,X)

TECHNICAL SPECIFICATIONS

■ External dimension	: 102 x 217 cm
■ Width outside side rails	: 98 cm
■ Mattres platform	: 86 x 200 cm
■ Bed extension	: +20 cm
■ Recommended mattress dimension	: 86 x 197 x 12 cm
■ Autoregression (Backrest and Legrest)	: 12 cm
■ Safe Operating Load (Inc. Mattres and Accessories)	: 230 kg
■ Weight	: ~ 133 kg
■ Volume	: 1,14 m ³

ELECTRICAL SPECIFICATIONS

■ Power Input	: 230 V AC 50 Hz Max 1 A
■ Power Output	: 24 V DC
■ Electrical Current Protection	: Class 1, Type B
■ Liquid and Dust Protection	: IP54 – IP66



* RL : Laminate color options page 80.

90101112 REBORN 3

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Cardiac position



Trendelenburg position : 0 - 16°



Anti - trendelenburg position : 0 - 16°



Mattress platform minimum height : 50 cm



Mattress platform maximum height : 80 cm


HOSPITAL BED 4 MOTORS WITH SCISSOR

OPTIONS

GROUP 1 / CASTOR OPTIONS




GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 4 / BACKREST MOTOR OPTIONS




GROUP 5 / LEGREST MOTOR OPTIONS



GROUP 6 / MATTRESS PLATFORM OPTIONS



GROUP 7 / OTHER ACCESSORY OPTIONS

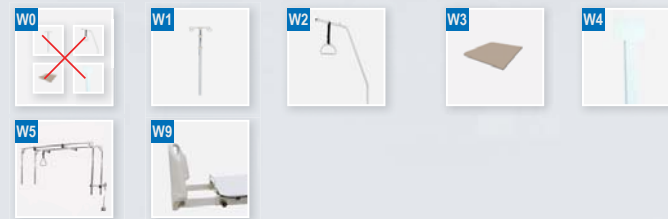

DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)	M3 LEGREST MOTOR (4000 N)
T14 CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)	M4 LEGREST CPR MANUAL CONTROL MOTOR (2000 N)
T17 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)	Y1 REMOVABLE 4 PARTED MESH PLATFORM.
K0 WITHOUT SIDE RAIL	Y3 REMOVABLE DOUBLE WALLED PE BED PLATFORM
K4 WITH ALUMINIUM SIDE RAIL	W0 WITHOUT OTHER ACCESSORIES
E0 WITHOUT ELECTRICAL ACCESSORIES	W1 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
E1 BATTERY RECHARGEABLE LEAD GEL TYPE. OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.	W2 LIFTING POLE : BEARING CAPACITY 75 Kg
E2 NURSE CONTROL PANEL. PROTECTION CATEGORY : IP 66. 15 FUNCTION KEY. UNDER BED LIGHTING SYSTEM	W3 X-RAY AVAILABLE FOR BACK SIDE
E3 UNDER BED LIGHTING SYSTEM	W4 TELEVISION STAND FOR 17" LCD TV
M1 BACKREST MOTOR (4000 N)	W5 TRACTION APPARATUS
M2 BACKREST CPR MANUAL CONTROL MOTOR (2000 N)	W9 BED EXTENSION : 20 cm.

Red box: Must select only one of them.
Green box: Must select minimum one. Can select 1-2-3 ... both.

Blue box: Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Height, trendelenburg, reverse trendelenburg, head and foot movements with the help of an electrical motor.
- Ergonomic, durable and easily cleanable aluminum rails system with maximum safety designed in accordance with the standards of EN 60601-2-38.
- Head and foot platforms with automatic sliding system.
- Easily removable and installable, hygienic, high resistant head board system designed of compact laminate and aluminum.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Profile frame with easy removable PE plastic covers.
- Optional laminate color choice.^(RLX)

TECHNICAL SPECIFICATIONS

■ External dimension	: 102 x 217 cm
■ Width outside side rails	: 98 cm
■ Mattress platform	: 86 x 200 cm
■ Bed extension	: +20 cm
■ Recommended mattress dimension	: 86 x 197 x 12 cm
■ Autoregression (Backrest and Legrest)	: 12 cm
■ Safe Operating Load (Inc. Mattress and Accessories)	: 230 kg
■ Weight	: ~ 127 kg
■ Volume	: 1,23 m ³

ELECTRICAL SPECIFICATIONS

■ Power Input	: 230 V AC 50 Hz Max 1 A
■ Power Output	: 24 V DC
■ Electrical Current Protection	: Class 1, Type B
■ Liquid and Dust Protection	: IP54 – IP66



* RL : Laminate color options page 80.

90101131 REBORN 7

HOSPITAL BED 2 MOTORS

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Trendelenburg position : 0 - 12°

OPTIONS

GROUP 1 / CASTOR OPTIONS



120 Kg




125 Kg



125 Kg





130 Kg





150 Kg


GROUP 2 / SIDE RAIL OPTIONS




GROUP 3 / ELECTRICAL ACCESSORY OPTIONS



GROUP 4 / MATTRESS PLATFORM OPTIONS



GROUP 5 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)

T16 CASTOR TWO WITH BRAKE (125 MM)

T4 METAL CASTOR TWO WITH BRAKE (125 MM)

T14 CASTOR CENTRAL & DIRECTIONAL LOCK (125 MM)

T17 CASTOR CENTRAL & DIRECTIONAL LOCK (150 MM)

K0 WITHOUT SIDE RAIL

K4 WITH ALUMINIUM SIDE RAIL

E0 WITHOUT ELECTRICAL ACCESSORIES

E1 BATTERY RECHARGEABLE LEAD GEL TYPE.
OUTPUT VOLTAGE: 24 V DC. CAPACITY: 1,2 Ah.

E3 UNDER BED LIGHTING SYSTEM

Y1 REMOVABLE 4 PARTED MESH PLATFORM.

Y3 REMOVABLE DOUBLE WALLED PE BED PLATFORM

W0 WITHOUT OTHER ACCESSORIES

W1 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

W2 LIFTING POLE : BEARING CAPACITY 75 Kg

W4 TELEVISION STAND FOR 17" LCD TV

W5 TRACTION APPARATUS

Red box: Must select only one of them.

Green box: Must select minimum one. Can select 1-2-3 ... both.

Blue box: Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easy to clean four-piece bed platform.
- Head and foot movements with the help of an electrical motor.
- Trendelenburg movement by the help of shock absorber mechanism at foot side.
- Ergonomic, durable and easily cleanable aluminum rails system with maximum safety designed in accordance with the standards of EN 60601-2-38.
- Head and foot platforms with automatic sliding system.
- Easily removable and installable, hygienic, high resistant head board system designed of compact laminate and aluminum.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional laminate color choice.^(RLX)

TECHNICAL SPECIFICATIONS

■ External dimension	: 102 x 217 x 50 cm
■ Width outside side rails	: 99 cm
■ Mattress platform	: 86 x 200 cm
■ Recommended mattress dimension	: 86 x 197 x 12 cm
■ Autoregression (Backrest and Legrest)	: 12 cm
■ Safe Operating Load (Inc. Mattress and Accessories)	: 230 kg
■ Weight	: ~ 101 kg
■ Volume	: 1,23 m ³

ELECTRICAL SPECIFICATIONS

■ Power Input	: 230 V AC 50 Hz Max 1 A
■ Power Output	: 24 V DC
■ Electrical Current Protection	: Class 1, Type B
■ Liquid and Dust Protection	: IP54 – IP66



* RL : Laminate color options page 80.

90101134 SIMPLE 1

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Trendelenburg position : 0 - 12°

HOSPITAL BED 2 MOTORS

OPTIONS


GROUP 1 / CASTOR OPTIONS



GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)	W0 WITHOUT OTHER ACCESSORIES
T16 CASTOR TWO WITH BRAKE (125 MM)	W2 LIFTING POLE : BEARING CAPACITY 75 Kg
T4 METAL CASTOR TWO WITH BRAKE (125 MM)	W4 TELEVISION STAND FOR 17" LCD TV
K0 WITHOUT SIDE RAIL	W5 TRACTION APPARATUS
K1 WITH METAL SIDE RAIL	W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
K3 WITH METAL SIDE RAIL	

Must select only one of them.

Do not select the others if you select without accessory, if you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easily cleanable metal bed platform designed for the ventilation of the bed.
- Head and foot movements with the help of an electrical motor.
- Trendelenburg movement by the help of shock absorber mechanism at foot side.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- Melamine coated chipboard head and foot panels.
- Removable and installable head system that can be also used as a resultation board if necessary.
- Shock resistance plastic bumper wheels.
- Castor system with two-castor brake in a diameter of 125 mm.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS

■ External dimension	: 97 x 207 x 50 cm
■ Recommended mattress dimension	: 85 x 190 x 12 cm
■ Safe Operating Load (Inc. Mattress and Accessories)	: 230 kg
■ Weight	: ~ 86 kg
■ Volume	: 1,14 m ³

ELECTRICAL SPECIFICATIONS

■ Power Input	: 230 V AC 50 / 60 Hz 50W
■ Power Output	: 24 V DC



* RS : Melamine color options page 81.

90101212 SIMPLE 3

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position



Trendelenburg position : 0 - 12°


HOSPITAL BED WITH 2 CRANKS

OPTIONS


GROUP 1 / CASTOR OPTIONS



GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T1 TWIN CASTOR TWO WITH BRAKE (120 MM)	W0 WITHOUT OTHER ACCESSORIES
T16 CASTOR TWO WITH BRAKE (125 MM)	W2 LIFTING POLE : BEARING CAPACITY 75 Kg
T4 METAL CASTOR TWO WITH BRAKE (125 MM)	W4 TELEVISION STAND FOR 17" LCD TV
K0 WITHOUT SIDE RAIL	W5 TRACTION APPARATUS
K1 WITH METAL SIDE RAIL	W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
K3 WITH METAL SIDE RAIL	

Must select only one of them.

Do not select the others if you select without accessory, if you select the others you can select all or 1-2-3 ... of them.

GENERAL SPECIFICATIONS

- Easily cleanable metal bed platform designed for the ventilation of the bed.
- Head and foot movements with rotating levers.
- Trendelenburg movement by the help of shock absorber mechanism at foot side.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- Melamine coated chipboard head and foot panels.
- Removable and installable head system that can be also used as a resulation board if necessary.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS

■ External dimension	: 97 x 207 x 50 cm
■ Recommended mattress dimension	: 85 x 190 x 12 cm
■ Safe Operating Load (Inc. Mattress and Accessories)	: 230 kg
■ Weight	: ~ 82 kg
■ Volume	: 1,14 m ³



* RS : Melamine color options page 81.

90101213 SIMPLE 4

HOSPITAL BED WITH 2 CRANKS

FUNCTIONS



Backrest adjustment : 0 - 70°



Thigh rest adjustment : 0 - 40°



Foot rest mechanical adjustment : 0 - 25°



Vascular position



Fowler position

GENERAL SPECIFICATIONS

- Easily cleanable metal bed platform designed for the ventilation of the bed.
- Head and foot movements with rotating levers.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- Melamine coated chipboard head and foot panels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine coated chipboard color choice.^(RSX)

TECHNICAL SPECIFICATIONS


■ Width	: 102 cm
■ Length	: 208 cm
■ Height	: 50 cm
■ Weight	: ~ 80 kg
■ Volume	: 0,64 m ³

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T0	WITHOUT CASTORS
T4	METAL CASTOR TWO WITH BRAKE (125 MM)
T16	CASTOR TWO WITH BRAKE (125 MM)
K0	WITHOUT SIDE RAIL
K1	WITH METAL SIDE RAIL
K3	WITH METAL SIDE RAIL
W0	WITHOUT OTHER ACCESSORIES
W2	LIFTING POLE : BEARING CAPACITY 75 Kg
W8	IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

■ Must select only one of them.

■ Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.



* RS : Melamine color options page 81.

90101214 SIMPLE 5

HOSPITAL BED WITH 1 CRANK

GENERAL SPECIFICATIONS

- Easily cleanable metal bed platform designed for the ventilation of the bed.
- Head movement with rotating levers.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety.
- Melamine coated chipboard head and foot panels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine coated chipboard color choice. ^(RSX)

TECHNICAL SPECIFICATIONS

■ Width	: 102 cm
■ Length	: 208 cm
■ Height	: 50 cm
■ Backrest Adjustment	: 70°
■ Weight	: ~ 72 kg
■ Volume	: 0,64 m ³

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / SIDE RAIL OPTIONS



GROUP 3 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T0	WITHOUT CASTORS
T4	METAL CASTOR TWO WITH BRAKE (125 MM)
T16	CASTOR TWO WITH BRAKE (125 MM)
K0	WITHOUT SIDE RAIL
K1	WITH METAL SIDE RAIL
K3	WITH METAL SIDE RAIL
W0	WITHOUT OTHER ACCESSORIES
W2	LIFTING POLE : BEARING CAPACITY 75 Kg
W8	IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM

■ Must select only one of them.

■ Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.



* RS : Melamine color options page 81.

GENERAL SPECIFICATIONS

- Platform becomes from four sections. Bed floor is in the form of the grid so bed can receive the air.
- Head and foot movements with rotating levers.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety is optional.
- Portable head and foot boards.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine colour choice for the metal-framed wooden headboard.^(RSX)
- Optional laminate colour choice for the PE plastic headboard.^(RLX)

TECHNICAL SPECIFICATIONS


■ Width	: 98 cm
■ Length	: 208 cm
■ Height	: 48 cm
■ Backrest Adjustment	: 68°
■ Legrest Adjustment	: 35°
■ Weight	: ~ 63 kg
■ Volume	: 0,64 m ³

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / BOARD OPTIONS



GROUP 3 / SIDE RAIL OPTIONS



GROUP 4 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T0 WITHOUT CASTORS	W0 WITHOUT OTHER ACCESSORIES
T4 METAL CASTOR TWO WITH BRAKE (125 MM)	W2 LIFTING POLE : BEARING CAPACITY 75 Kg
T16 PLASTIC CASTOR TWO WITH BRAKE (125 MM)	W4 TELEVISION STAND FOR 17" LCD TV
B1 METAL BOARD	W5 TRACTION APPARATUS
B2 PE PLASTIC BOARD	W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
K0 WITHOUT SIDE RAIL	Must select only one of them.
K1 WITH METAL SIDE RAIL	Do not select the others if you select without accessory.
K3 WITH METAL SIDE RAIL	If you select the others you can select all or 1-2-3 ... of them.



* RS : Melamine color options page 81.

* RL : Laminate color options page 80.

90101218 SIMPLE 9

HOSPITAL BED WITH 1 CRANK

GENERAL SPECIFICATIONS

- Platform becomes from two sections. Bed floor is in the form of the grid so bed can receive the air.
- Head movement with rotating levers.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety is optional.
- Portable head and foot boards.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine colour choice for the metal-framed wooden headboard.^(RSX)
- Optional laminate colour choice for the PE plastic headboard.^(RLX)

TECHNICAL SPECIFICATIONS


■ Width	: 98 cm
■ Length	: 208 cm
■ Height	: 48 cm
■ Backrest Adjustment	: 68°
■ Weight	: ~ 52 kg
■ Volume	: 0,64 m ³

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / BOARD OPTIONS



GROUP 3 / SIDE RAIL OPTIONS



GROUP 4 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T0 WITHOUT CASTORS	W0 WITHOUT OTHER ACCESSORIES
T4 METAL CASTOR TWO WITH BRAKE (125 MM)	W2 LIFTING POLE : BEARING CAPACITY 75 Kg
T16 PLASTIC CASTOR TWO WITH BRAKE (125 MM)	W4 TELEVISION STAND FOR 17" LCD TV
B1 METAL BOARD	W5 TRACTION APPARATUS
B2 PE PLASTIC BOARD	W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
K0 WITHOUT SIDE RAIL	Must select only one of them.
K1 WITH METAL SIDE RAIL	Do not select the others if you select without accessory.
K3 WITH METAL SIDE RAIL	If you select the others you can select all or 1-2-3 ... of them.



* RS : Melamine color options page 81.

* RL : Laminate color options page 80.

GENERAL SPECIFICATIONS

- Platform becomes from two sections. Bed floor is in the form of the grid so bed can receive the air.
- Back movement with gradual metal sheet system.
- Ergonomic, durable and easily cleanable metal rails system with maximum safety is optional.
- Portable head and foot boards.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Optional melamine colour choice for the metal-framed wooden headboard.^(RSX)
- Optional laminate colour choice for the PE plastic headboard.^(RLX)

TECHNICAL SPECIFICATIONS


■ Width	: 98 cm
■ Length	: 208 cm
■ Height	: 48 cm
■ Backrest Adjustment	: 68°
■ Weight	: ~ 46 kg
■ Volume	: 0,48 m ³

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / BOARD OPTIONS



GROUP 3 / SIDE RAIL OPTIONS



GROUP 4 / OTHER ACCESSORY OPTIONS



DESCRIPTION OF OPTION CODES

T0	WITHOUT CASTORS	W0	WITHOUT OTHER ACCESSORIES
T4	METAL CASTOR TWO WITH BRAKE (125 MM)	W2	LIFTING POLE : BEARING CAPACITY 75 Kg
T16	PLASTIC CASTOR TWO WITH BRAKE (125 MM)	W4	TELEVISION STAND FOR 17" LCD TV
B1	METAL BOARD	W5	TRACTION APPARATUS
B2	PE PLASTIC BOARD	W8	IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
K0	WITHOUT SIDE RAIL		
K1	WITH METAL SIDE RAIL		
K3	WITH METAL SIDE RAIL		

■ Must select only one of them.
■ Do not select the others if you select without accessory. If you select the others you can select all or 1-2-3 ... of them.



* RS : Melamine color options page 81.

* RL : Laminate color options page 80.

90102101 CONFIDENCE 1 HOSPITAL BED FOR CHILD

GENERAL SPECIFICATIONS


- Easily cleanable metal bed platform designed for the ventilation of the bed.
- Backrest adjusted by mechanical system.
- Ergonomic, durable and easily cleanable rails system that can be adjustable at both sides of the bed.
- Shock resistance plastic bumper wheels.
- Metal components dyed with anti-corrosion electrostatic powder paint after being treated with phosphate.
- Cabinet, which is metal bodied, is designed to multi usage on legrest of child bed. (Optional)
- Optional laminate color choice. ^(RLX)

TECHNICAL SPECIFICATIONS

■ Width	: 77 cm
■ Length	: 156 cm
■ Height	: 50 cm
■ Weight (Without Accessory)	: ~ 53 kg
■ Accompaniment Weight	: ~ 13 kg
■ Weight (Cabinet)	: ~ 19,5 kg
■ Volume (Without Accessory)	: 0,17 m ³
■ Volume (Cabinet)	: 0,14 m ³

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / CABINET OPTIONS



GROUP 3 / ACCOMPANIMENT OPTIONS



GROUP 4 / IV STAND OPTIONS



DESCRIPTION OF OPTION CODES

- T0 WITHOUT CASTORS
 - T4 METAL CASTOR TWO WITH BRAKE (125 MM)
 - D0 WITHOUT CABINET
 - D2 WITH CABINET
 - R0 WITHOUT ACCOMPANIMENT BED
 - R1 WITH ACCOMPANIMENT BED
 - W0 WITHOUT OTHER ACCESSORIES
 - W8 IV STAND : ONE HEIGHT ADJUSTMENT SYSTEM
- Must select only one of them.



* RL : Laminate color options page 80.

FUNCTIONS



Height : 85,5 cm



Trendelenburg position : 0 - 14°



Anti - trendelenburg position : 0 - 14°

OPTIONS

GROUP 1 / CASTOR OPTIONS



GROUP 2 / CABINET OPTIONS



DESCRIPTION OF OPTION CODES

- T0** WITHOUT CASTORS
- T7** CASTOR TWO WITH BRAKE (50 MM)
- D0** WITHOUT CABINET
- D1** METAL WITH CABINET

■ Must select only one of them.

GENERAL SPECIFICATIONS

- Manufacture from antibacterial, transparent flexi glass and portable.
- Trendelenburg and reverse trendelenburg position are adjusted by mechanical system.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily by 50 mm diameter four castors two of them with brake to fix the position. (Optional)

TECHNICAL SPECIFICATIONS

- | | | |
|------------------------------|---|---------|
| ■ Width | : | 45 cm |
| ■ Length | : | 79 cm |
| ■ Weight (Without Accessory) | : | ~ 11 kg |
| ■ Weight (Cabinet) | : | ~ 8 kg |
| ■ Volume | : | 0,34 m³ |

