

90205106

## FUNCTIONS



## PATIENT HANDLING LIFT

### GENERAL SPECIFICATIONS

- It may be easily used in narrow spaces due to adjustable foot system.
- Lifting functions may be easily performed due to the engine system which is controlled by remote control.
- In case of any malfunction, the height movement may be operated manually.
- Long lasting battery system and led system indicating the status of the battery
- It provides continuous use due to the back up battery and charging unit.
- Its safe bearing capacity is 220 kg.
- XS, S, M, L, XL lifting apparatus (SILING) options are available.
- There is a lifting stretcher for lifting the patient horizontally.
- There are impact wheels that are resistant against impacts.
- It may be easily moved to the desired direction due to wheels with 100 mm diameter.
- Metal components painted with electrostatic paint after being coated with phosphate against corrosion.

### OPTIONS

#### GROUP 1 / SLING OPTIONS




#### GROUP 2 / WALKING JACKET OPTIONS




#### GROUP 3 / STRETCHER OPTIONS



#### GROUP 4 / HANDLING APPARATUS OPTIONS

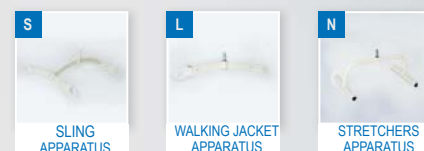

Do not select the others if you select without accessory.  
If you select the others you can select all or 1-2-3 ... of them.

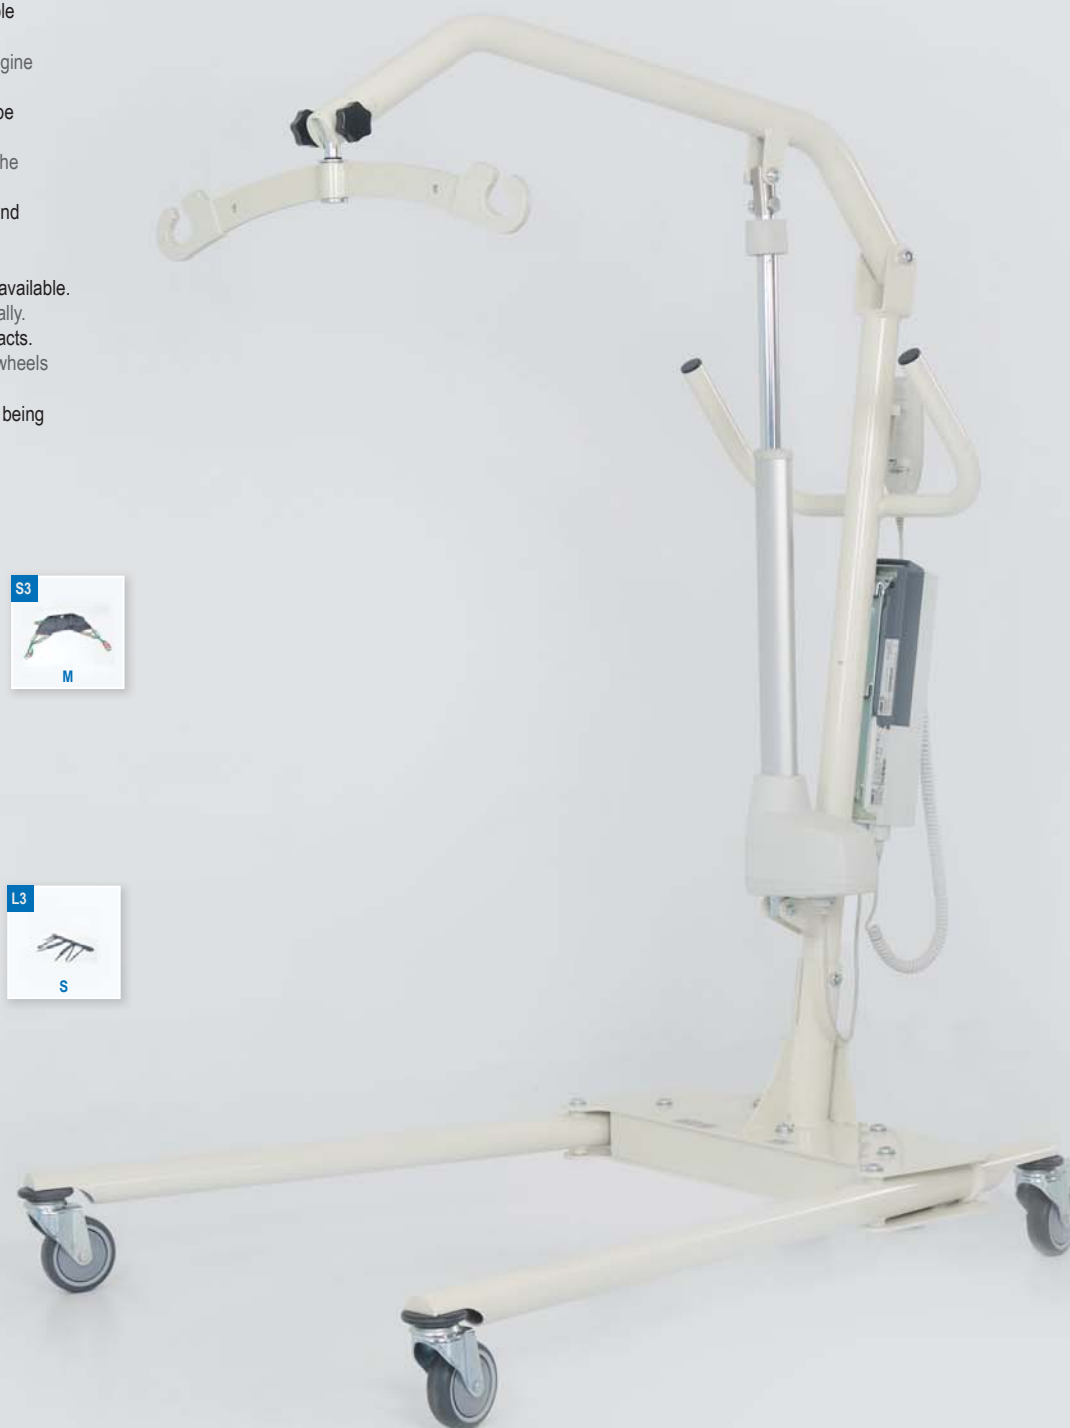

## 90106101

## OVER BED TABLE MECHANICAL

### GENERAL SPECIFICATIONS

- Laminate or ABS plastic top is durable against to water and heat.
- Height of over bed table is adjusted by mechanical handle according to height of bed.
- Epoxy painted steel construction is resistant to corrosion.
- With four castors (two of them with brake) can move freely.

### TECHNICAL SPECIFICATIONS


|                |                       |
|----------------|-----------------------|
| ■ Width        | : 80 cm               |
| ■ Depth        | : 40 cm               |
| ■ Height (min) | : 79 cm               |
| ■ Height (max) | : 103 cm              |
| ■ Weight       | : ~ 9 kg              |
| ■ Volume       | : 0,30 m <sup>3</sup> |

\* RS : Melamine color options page 81.

\* RL : Laminate color options page 80.

### OPTIONS

#### GROUP 1 / TABLE TOP OPTIONS



#### DESCRIPTION OF OPTION CODES

- YL1 LAMINATE COATED CHIPBOARD TOP
  - YL2 ABS TOP
  - YL3 COMPACT LAMINATE TOP
  - YL4 MELAMINE COATED CHIPBOARD TOP
- Must select only one of them.



## 90106201

## OVER BED TABLE WITH GAS SPRING

### GENERAL SPECIFICATIONS

- Laminate or ABS plastic top is durable against to water and heat.
- High of over bed table is adjusted by gas spring according to height of bed.
- Epoxy painted steel construction is resistant to corrosion.
- With four castors (two of them with brake) can move freely.

### TECHNICAL SPECIFICATIONS


|                |                       |
|----------------|-----------------------|
| ■ Width        | : 80 cm               |
| ■ Depth        | : 40 cm               |
| ■ Height (min) | : 79 cm               |
| ■ Height (max) | : 103 cm              |
| ■ Weight       | : ~ 10,5 kg           |
| ■ Volume       | : 0,30 m <sup>3</sup> |

\* RS : Melamine color options page 81.

\* RL : Laminate color options page 80.

### OPTIONS

#### GROUP 1 / TABLE TOP OPTIONS



#### DESCRIPTION OF OPTION CODES

- YL1 LAMINATE COATED CHIPBOARD TOP
  - YL2 ABS TOP
  - YL3 COMPACT LAMINATE TOP
  - YL4 MELAMINE COATED CHIPBOARD TOP
- Must select only one of them.



## 90116101

## IV STAND

**GENERAL SPECIFICATIONS**

- Height of IV stand is adjusted owing to mechanic system
- Long lived metallic body and three legs bottom epoxy painted steel construction
- There are two serum hooks.
- Moves easily with 50 mm diameter castor.

**TECHNICAL SPECIFICATIONS**

|                |                       |
|----------------|-----------------------|
| ■ Height (min) | : 107 cm              |
| ■ Height (max) | : 192 cm              |
| ■ Weight       | : approx 2,5 kg       |
| ■ Volume       | : 0,23 m <sup>3</sup> |



## 90116201

## IV STAND

**GENERAL SPECIFICATIONS**

- Height of IV stand is adjusted owing to mechanic system.
- Long lived plastics five legs bottom.
- There are four serum hooks.
- Epoxy painted steel construction is resistant to corrosion.
- Moves easily with 50 mm diameter castor.

**TECHNICAL SPECIFICATIONS**

|                |                       |
|----------------|-----------------------|
| ■ Height (min) | : 110 cm              |
| ■ Height (max) | : 195 cm              |
| ■ Weight       | : approx 3,5 kg       |
| ■ Volume       | : 0,33 m <sup>3</sup> |

