




CA-700 SYRINGE PUMP

canafusion

Proudly Canadian!

FEATURES


- Docking station: available in 2, 4 and 6 modules.
- Adapt to 5ml, 10 ml, 20/30 ml, and 50/60 ml syringes from major brands.
- Wide range of fbw rate from 0.1 to 1000 ml/h.
- Flexible infusion modes: ml/h, time/volume and weight mode.
- Digital programming with large & bright OLED display.
- Long battery back-up to support patient transport.

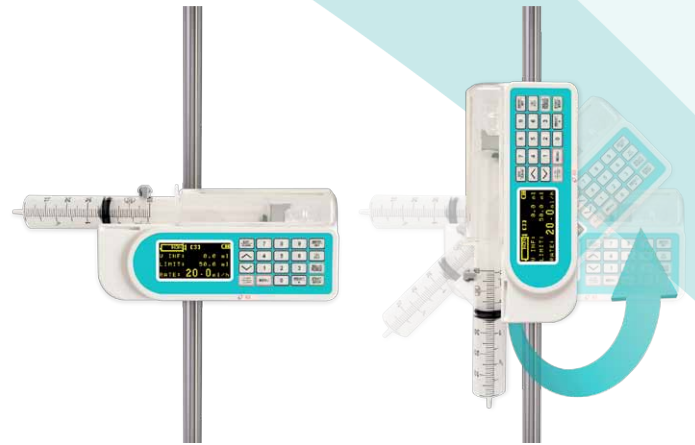

Able to rotate 360 degrees to fit the patient's needs

BACK VIEW

Mount the pump easily to IV stand with detachable pole clamp

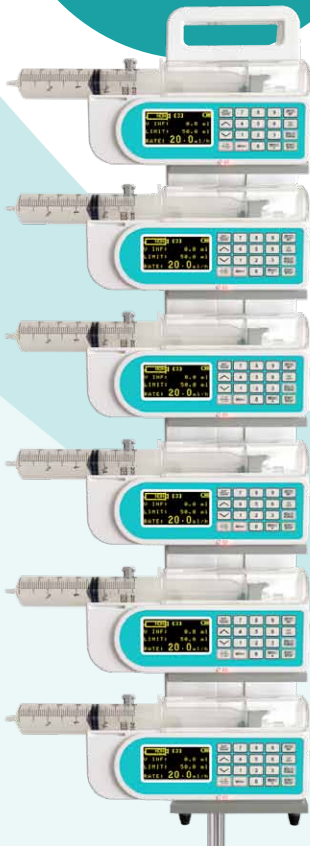

6 syringe infusion station



4 syringe infusion station



2 syringe infusion station



CE
0086



PRODUCT SPECIFICATIONS

| | |
|----------------------|--|
| Infusion Rate Range | 10 ml syringe -----> 0.1-300 ml/h 20/30 ml syringe -----> 0.1-500 ml/h 50/60 ml syringe -----> 0.1-1000 ml/h |
| Flow Rate Increments | 0.1-100 ml/h at 0.1 ml/h increments 100-1000 ml/h at 1ml/h increments |
| Volume Limit | 1 - 999ml; Increment: 0.1 or 1ml |
| Bolus Volume | Programmable from 1 to 999 ml. |
| Bolus Rate | Programmable from 0.1 to 1000 ml/h based on syringe size |
| Accuracy | ± 2% on the pump only (± 5% with syringe) |
| Occlusion Pressure | 5.8 to 14.5 psi, adjustable from High, Medium, Low |
| Alarm Volume | Selectable from High, Medium & Low |
| Alarms | Syringe not Loaded, Start Reminder, Near Empty, Complete, Occlusion, Low Battery, Syringe Disengaged, Mechanical Error, Infusion Error, Battery Depleted |
| KVO (keep vein open) | Automatically switches to KVO rate (from 0.1 to 3 ml/h) at the end of infusion process |
| Power Supply | AC 100-240V 50/60 Hz |
| Battery | Built-in rechargeable Lithium battery Pump will operate up to 8 hours min. at 25 ml/h with fully charged battery |
| Dimensions | 210(L) x 100(W) x 45(H) mm |
| Weight | 500g (battery included) |



Canafusion Technologies Inc.

301-2999 Underhill Ave. Burnaby, BC Canada. V5A 3C2
Tel: +1(604) 568.0936 / +1(604) 568.6977 Fax: +1(604) 677.5295

canafusion.com • info@canafusion.com